


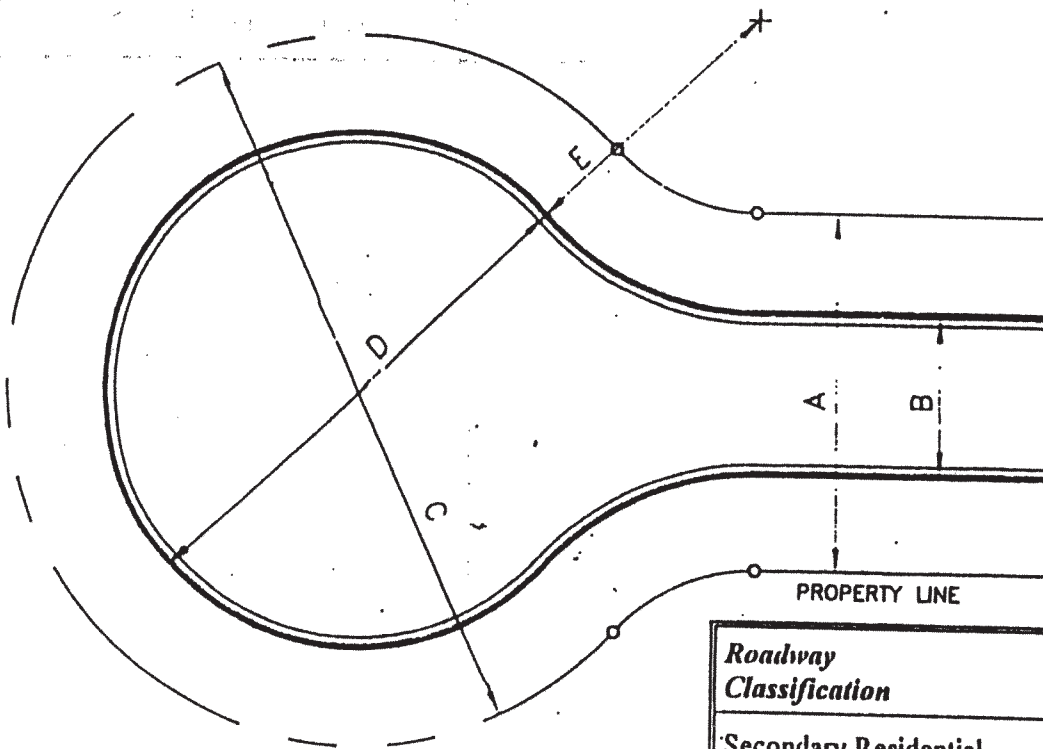

Roadway Classification	A	B	C	D	E
Secondary Residential	50'	26'	110'	93'	50'
Secondary Residential	60'	26'	120'	93'	50'
Sencondary Industrial	66'	40'	150'	110'	50'
Business District	70'	48'	150'	110'	50'

General Notes

Note: Dimensions to curb are at flowline

1. Provide 1% minimum flowline grade. Top of curb elevations are required for all curb intervals not to exceed 50 feet.
2. Pave to provide smooth grade and positive drainage.
3. Sidewalks shall be located in accordance with applicable roadway standards.
4. Center islands are NOT acceptable



ROCKVILLE

APPROVED BY: Joseph Pulro
Joseph Pulro - Chief Engineer/Transportation

Date: 8/13/96

CUL - DE - SAC

10/97

REVISION

DETAIL

46