

NOTES:
PRUNE TO REMOVE DEAD, BROKEN OR
CROSSING BRANCHES AND TO IMPROVE FORM

STAKES ARE OPTIONAL

STAKES INTO
UNDISTURBED SOIL AT
EDGE OF PLANTING PIT


BACKFILL WITH
EXCAVATED SOIL- REFER
TO THE FTPO TREE
PLANTING SOIL
SPECIFICATIONS NOTE 3

WATER AT PLANTING
WHEN SOIL PIT IS 1/2
BACKFILLED;
SUPPLEMENT WEEKLY
WITH 10 GALL. PER CAL.
MEASURE OF TREE
DIAMETER

2"-4" HIGH MULCH
SAUCER AT EDGE OF
PLANTING PIT

SLOPE SIDES OF THE
PLANTING PIT
SCARIFY SIDES
DO NOT DIG PIT WHEN
SOIL IS SATURATED

NOTE: coordinate planting in public
right-of with the Public Works
Inspector and the City Forester

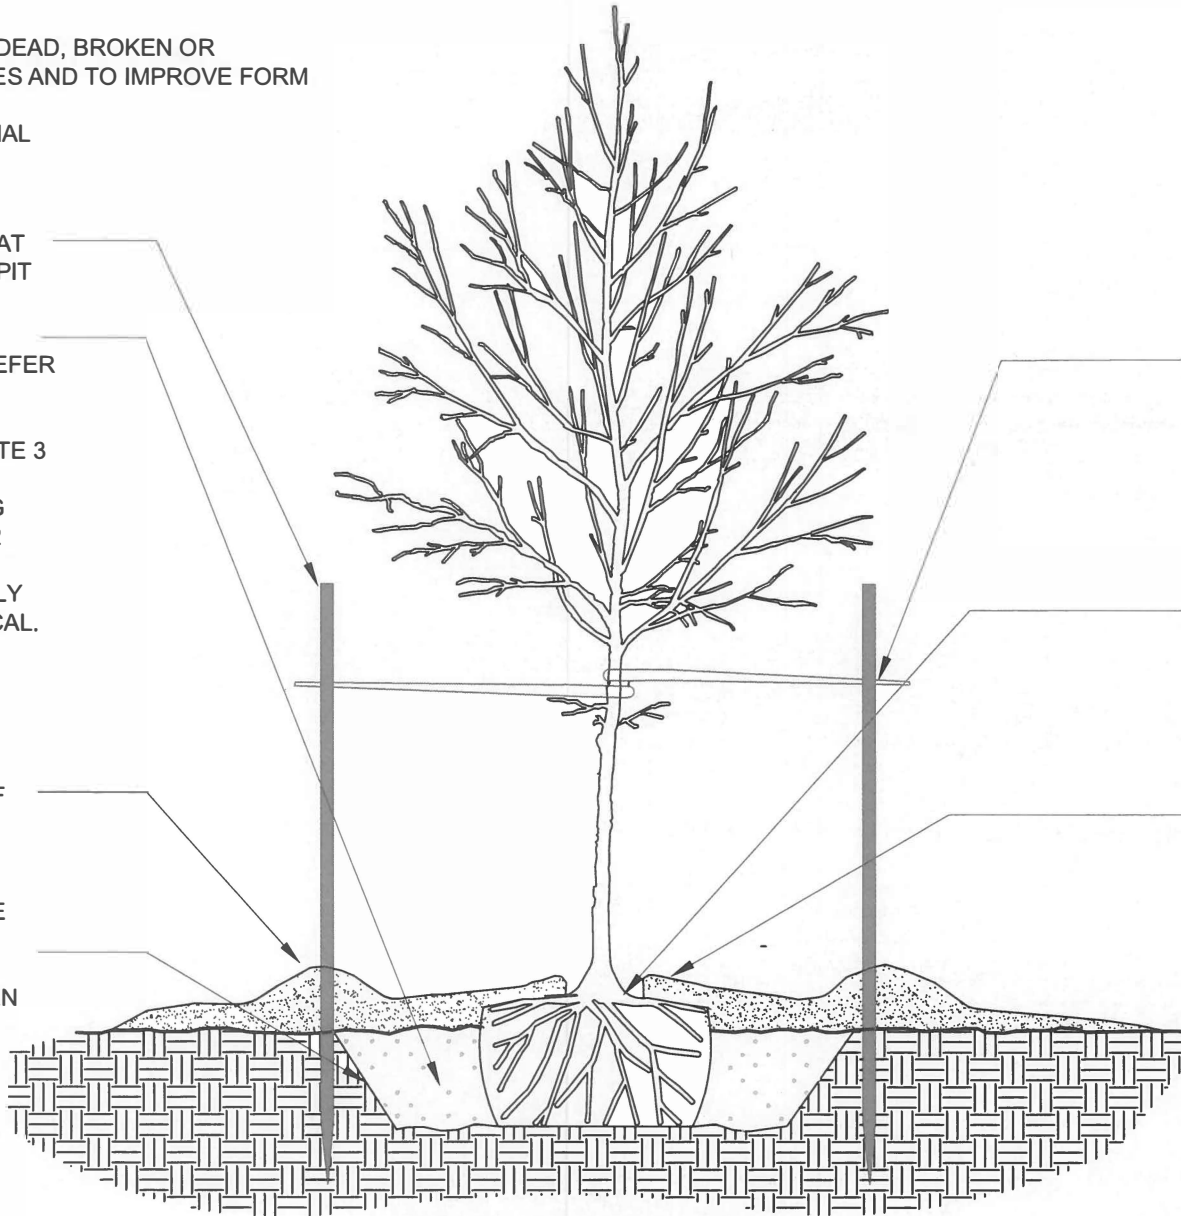

PLANTING PIT MUST BE MINIMUM
2x DIAMETER OF ROOTBALL (UP TO
5x MAY BE REQUIRED)

USE NYLON, POLYPROPYLENE,
OR SIMILAR 3/4"-1" WIDE WOVEN
CLOTH TREE STRAPS, OR
APPROVED EQUAL.

DO NOT USE HOSE AND WIRE
GUYS OR CHAIN LOCK.

'FIGURE 8' STRAP AROUND
TRUNK ALLOW 1/2"-1" TRUNK
MOVEMENT

NAIL/STAPLE GUY STRAP TO
STAKE; DO NOT TIE STRAP
TIGHTLY TO THE TRUNK

REMOVE ALL STAKES AND
GUYS AFTER 6 MONTHS

EXPOSE ROOT FLARE LEVEL
WITH OR MAXIMUM 3" ABOVE
FINAL GRADE. SITUATE ROOT
BALL AT CORRECT HEIGHT IN
PLANTING HOLE, BASED ON
ROOT BALL DEPTH..

3" HARDWOOD MULCH ON
ENTIRE PLANTING PIT EXCEPT
KEEP MULCH 3" AWAY FROM
TRUNK

REMOVE A MINIMUM OF 1/2
BASKET/BURLAP FROM SIDES AND
TOP OF ROOTBALL. DO NOT ROLL
BURLAP. REMOVE ALL BURLAP.



APPROVED BY:

W. Wall
CITY FORESTER

DATE:

3/30/17

SHADE TREE PLANTING DETAIL

DETAIL
A-1