
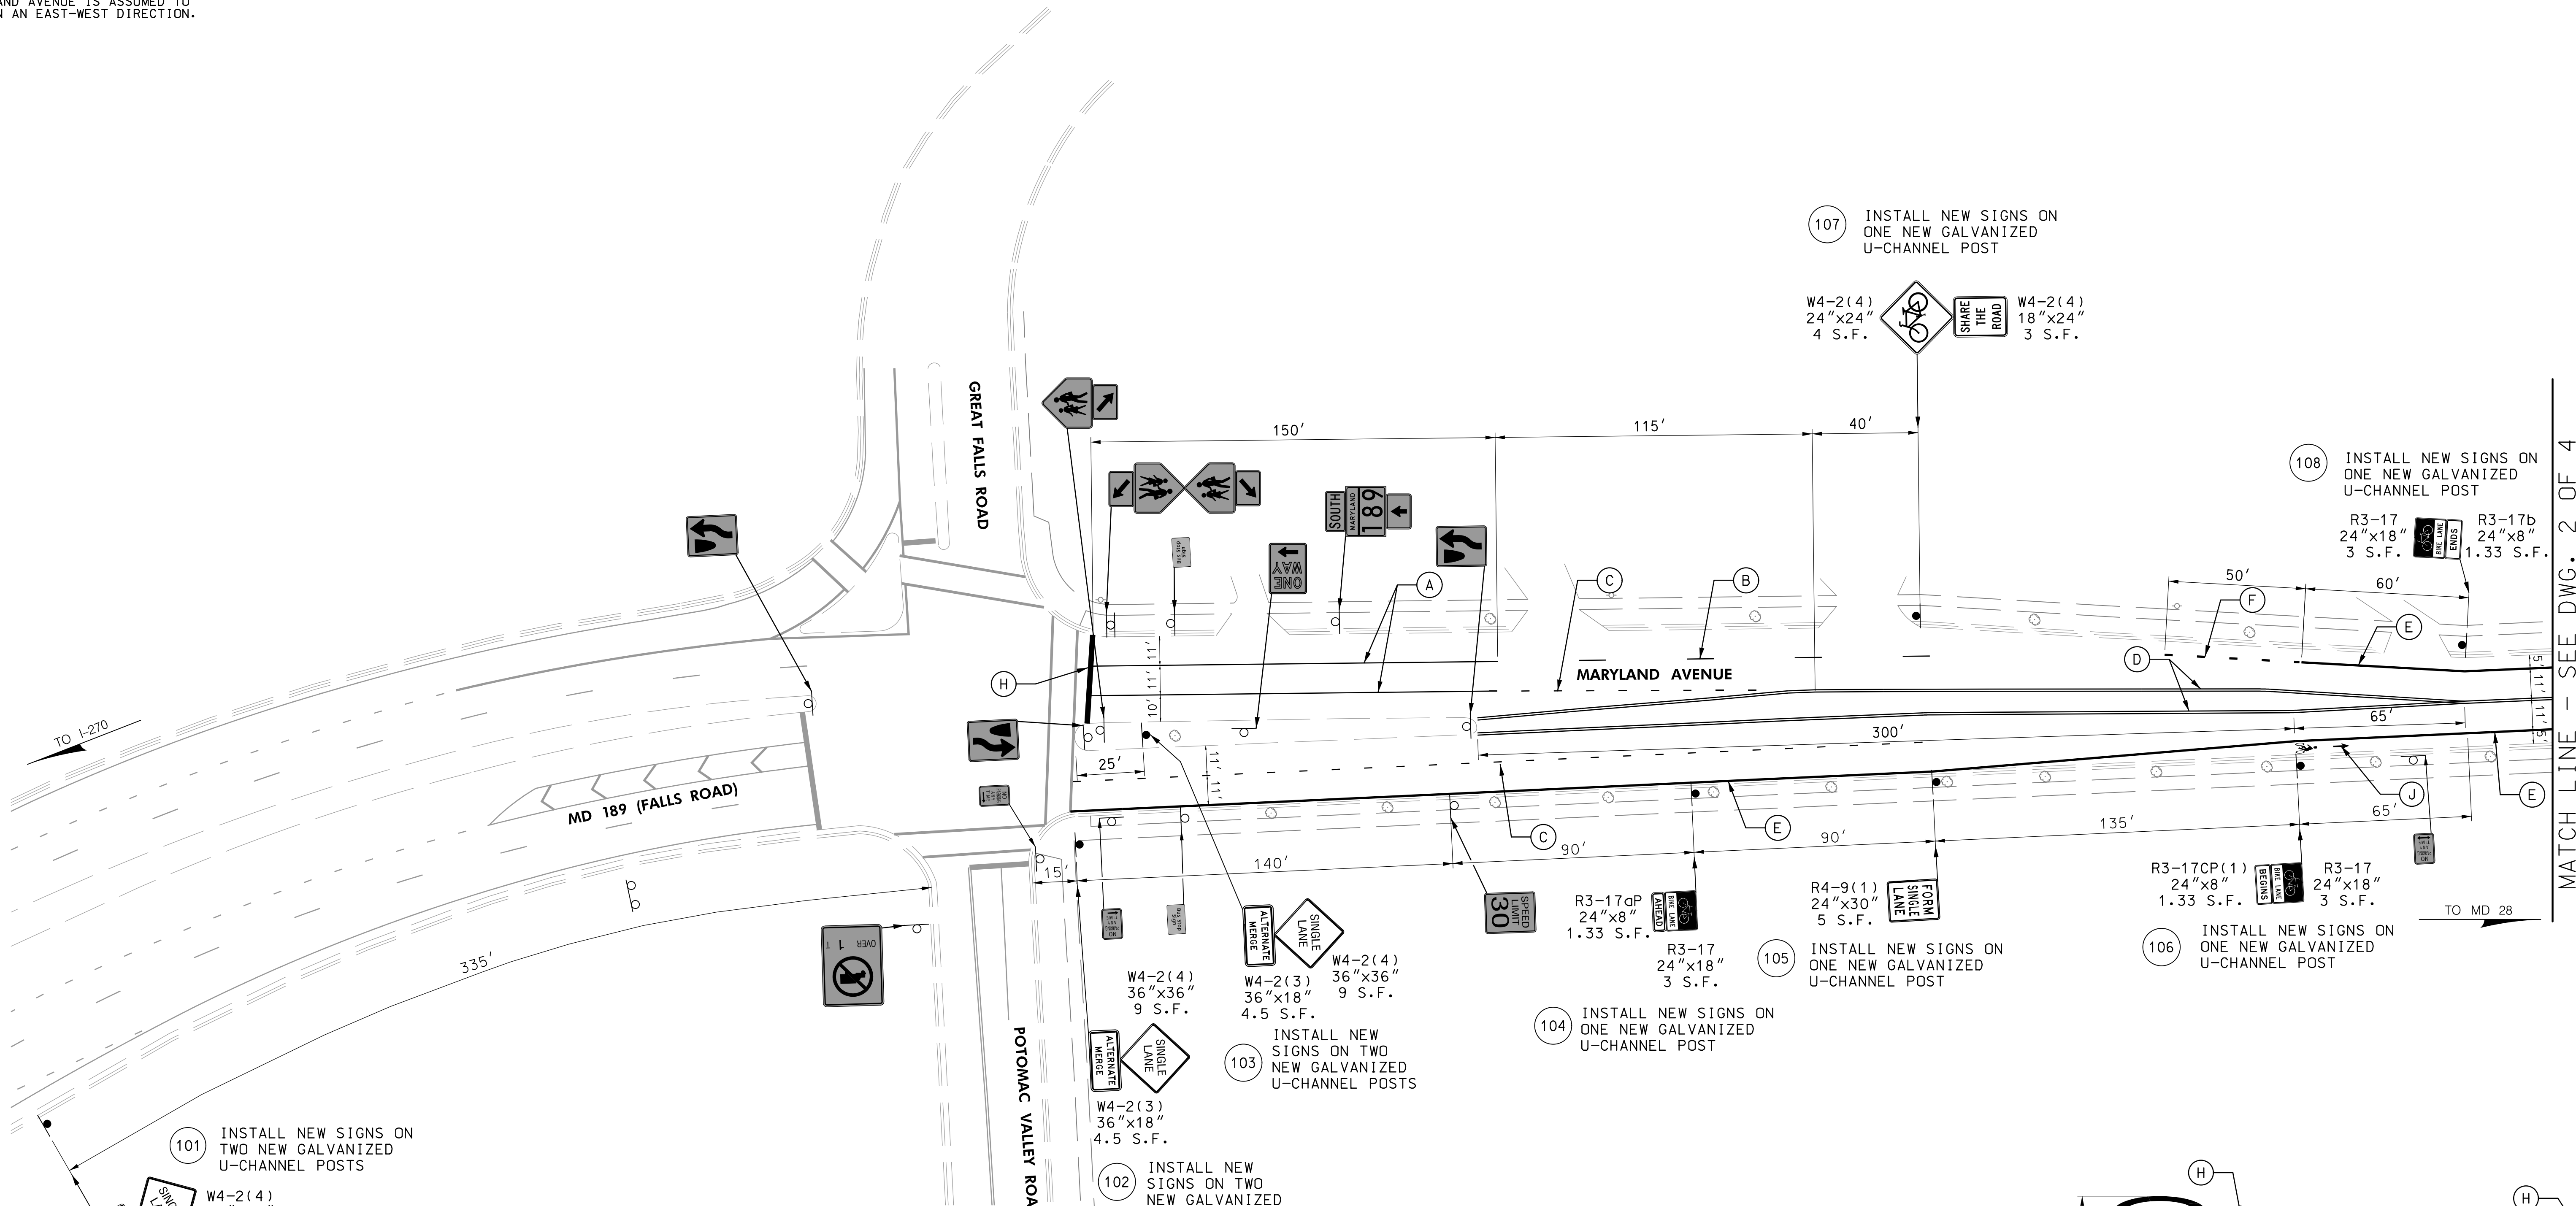


DRILL HOLES

DRILL HOLES

DRILL HOLES

MARYLAND AVENUE IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.

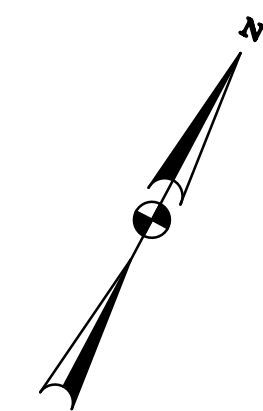

MATCH LINE - SEE DWG. 2 OF 4

101 INSTALL NEW SIGNS ON TWO NEW GALVANIZED U-CHANNEL POSTS

W4-2(4) 36"x36" 9 S.F.

W5-3(1) 30"x18" 3.75 S.F.

102 INSTALL NEW SIGNS ON TWO NEW GALVANIZED U-CHANNEL POSTS

W4-2(3) 36"x18" 4.5 S.F.

103 INSTALL NEW SIGNS ON TWO NEW GALVANIZED U-CHANNEL POSTS

W4-2(4) 36"x36" 9 S.F.

W4-2(3) 36"x18" 4.5 S.F.

104 INSTALL NEW SIGNS ON ONE NEW GALVANIZED U-CHANNEL POST

105 INSTALL NEW SIGNS ON ONE NEW GALVANIZED U-CHANNEL POST

R3-17 24"x18" 3 S.F.

R4-9(1) 24"x30" 5 S.F.

106 INSTALL NEW SIGNS ON ONE NEW GALVANIZED U-CHANNEL POST

R3-17CP(1) 24"x8" 1.33 S.F.

R3-17 24"x18" 3 S.F.

108 INSTALL NEW SIGNS ON ONE NEW GALVANIZED U-CHANNEL POST

R3-17 24"x18" 3 S.F.


R3-17b 24"x8" 1.33 S.F.

107 INSTALL NEW SIGNS ON ONE NEW GALVANIZED U-CHANNEL POST

W4-2(4) 24"x24" 4 S.F.

W4-2(4) 18"x24" 3 S.F.

LEGEND	
	PROPOSED SIGN & SUPPORT
	EXISTING SIGN & SUPPORT TO REMAIN
	EXISTING SIGN & SUPPORT TO BE REMOVED
	A 5' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
	B 5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (10' LINE, 30' SPACE)
	C 5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
	D 5' SOLID DOUBLE YELLOW LEAD FREE THERMOPLASTIC PAVEMENT MARKING
	E 10' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
	F 10' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
	G 12' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (CROSSWALK)
	H 24' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (STOP LINE)
	J WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS
	K REMOVE EXISTING PAVEMENT MARKING

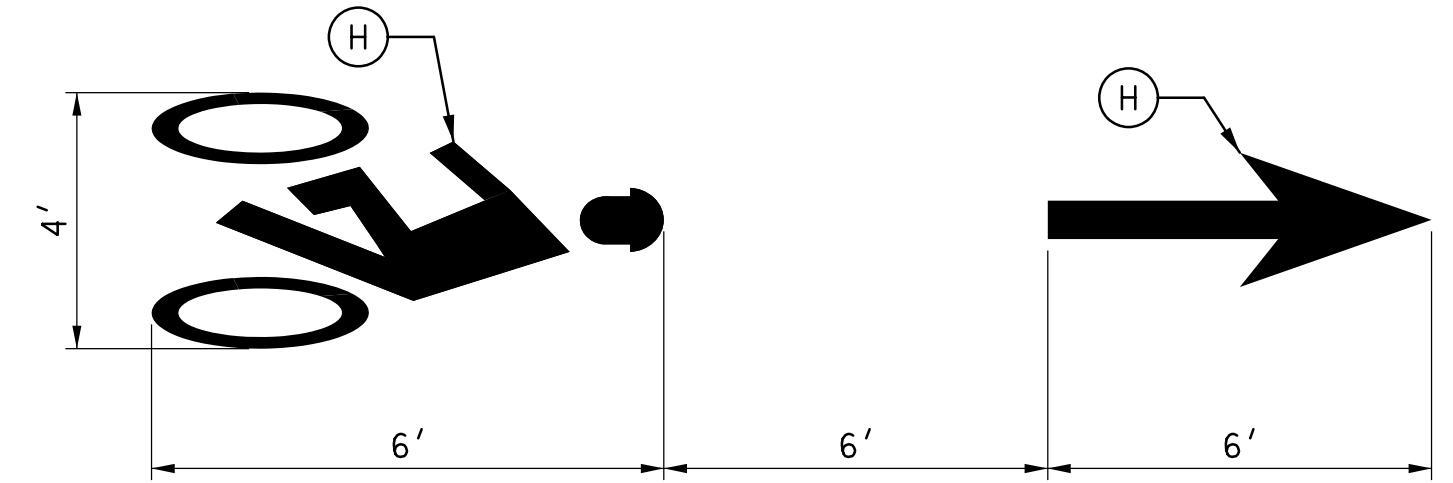

BICYCLE LANE PAVEMENT MARKING DETAIL
SCALE: NOT TO SCALE

WALLACE MONTGOMERY
ENGINEERS-PLANNERS-SURVEYORS-CONSTRUCTION MANAGERS
10150 York Road, Suite 200
Hunt Valley, Maryland 21030
410.494.9093 Tel / 410.667.0925 Fax
www.WallaceMontgomery.com A Limited Liability Partnership

DESIGNED <u>R.W.E.</u>	APPROVED _____ DATE _____	GRAD. _____
DRAWN <u>D.W.J.</u>		PAV. _____
CHECKED <u>J.L.R.</u>	DIRECTOR OF PUBLIC WORKS	SD _____
		W&S _____
		SWM _____
		OTHER _____

DEPARTMENT OF PUBLIC WORKS
CITY OF
ROCKVILLE
MARYLAND AT VINSON ROCKVILLE, MARYLAND

DATE PROJECT STARTED _____
DATE PROJECT COMPLETED _____
DATE ACCEPTED BY CITY _____
DATE TRANS. TO FINANCE DEPT. W/R 9 FORM _____

AS BUILT COMPLETED _____ DATE _____
CHIEF INSPECTOR _____

SIGNING AND MARKING PLAN

MARYLAND AVENUE SIGNING & MARKING MODIFICATIONS

NO.	REVISIONS	APP'D	DATE
	DATE AUG 2021		
	SCALE 1"=30'	DRAWING NO. 1 OF 4	FILE SN-01

SURVEY BOOK NO.

8/31/2021 \$FILEL\$


INDEXED

BY: SXIONG


DRILL HOLES

DRILL HOLES

DRILL HOLES

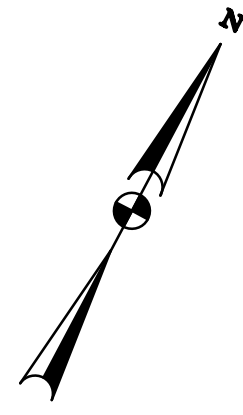

MARYLAND AVENUE IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.

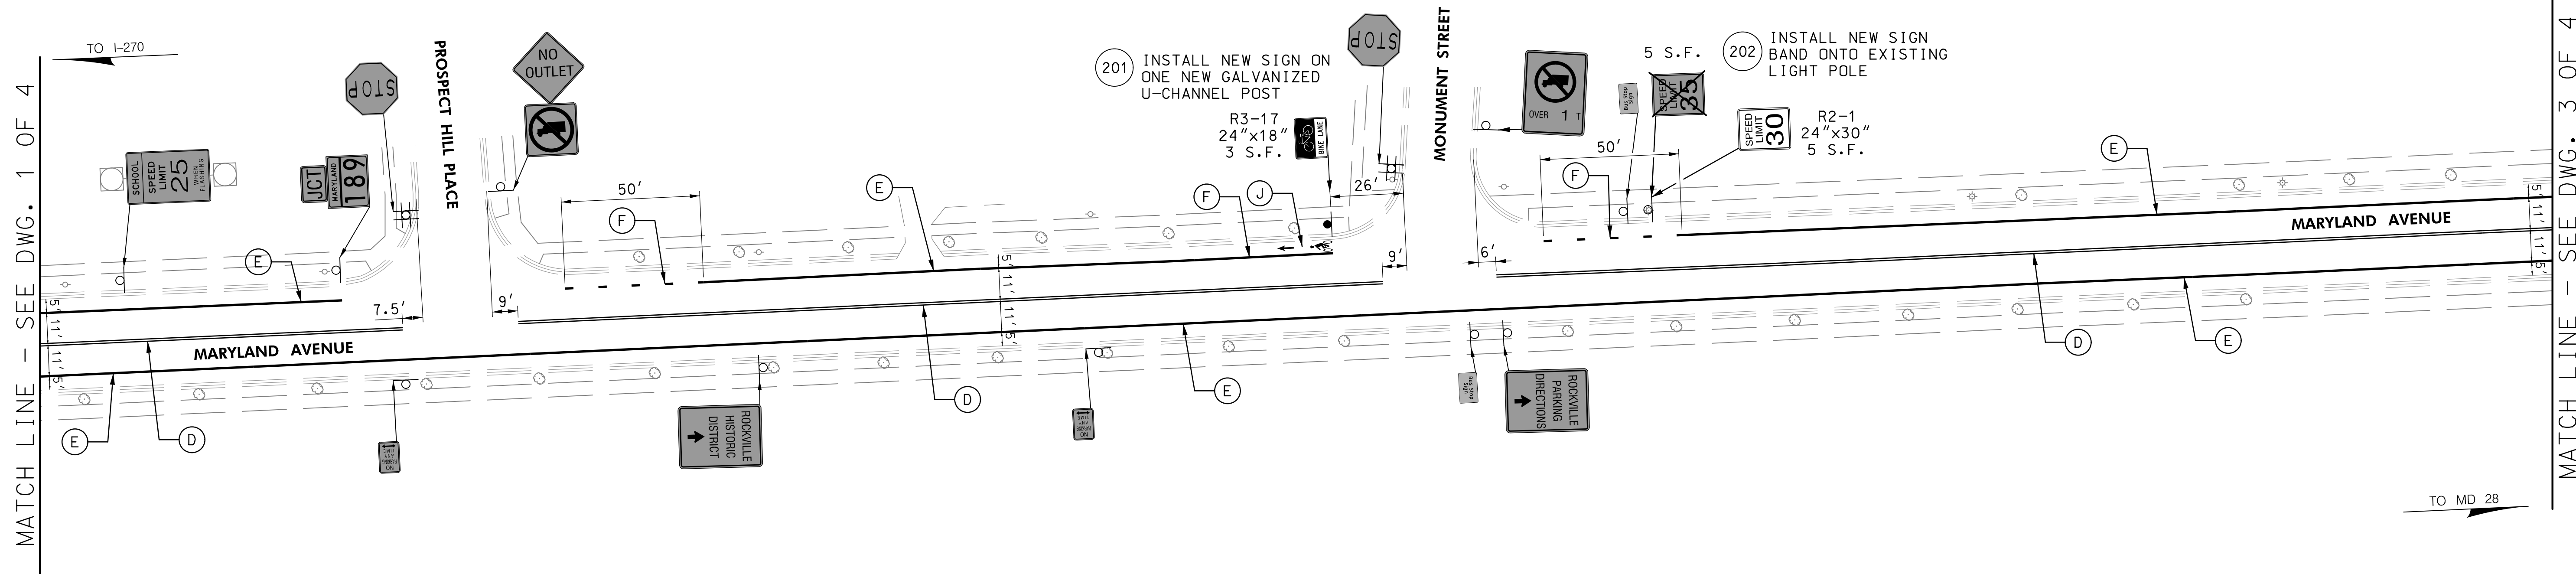

MATCH LINE - SEE DWG. 1 OF 4

MATCH LINE - SEE DWG. 3 OF 4

TO MD 28

WALLACE MONTGOMERY
 ENGINEERS-PLANNERS-SURVEYORS-CONSTRUCTION MANAGERS
 10150 York Road, Suite 200
 Hunt Valley, Maryland 21030
 410.494.9093 Tel / 410.667.0925 Fax
 www.WallaceMontgomery.com A Limited Liability Partnership

LEGEND	
	PROPOSED SIGN & SUPPORT
	EXISTING SIGN & SUPPORT TO REMAIN
	EXISTING SIGN & SUPPORT TO BE REMOVED
A	5' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
B	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (10' LINE, 30' SPACE)
C	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
D	5' SOLID DOUBLE YELLOW LEAD FREE THERMOPLASTIC PAVEMENT MARKING
E	10' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
F	10' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
G	12' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (CROSSWALK)
H	24' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (STOP LINE)
J	WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS
K	REMOVE EXISTING PAVEMENT MARKING

BY: SXIONG

DESIGNED <u>R.W.E.</u>	APPROVED _____ DATE _____	GRAD. _____
DRAWN <u>D.M.J.</u>		PAV. _____
CHECKED <u>J.L.R.</u>	DIRECTOR OF PUBLIC WORKS	SD _____
		W&S _____
		SWM _____
		OTHER _____

DEPARTMENT OF PUBLIC WORKS
 CITY OF
ROCKVILLE
 MARYLAND AT VINSON ROCKVILLE, MARYLAND

DATE PROJECT STARTED _____
 DATE PROJECT COMPLETED _____
 DATE ACCEPTED BY CITY _____
 DATE TRANS. TO FINANCE DEPT. W/R 9 FORM _____

AS BUILT COMPLETED _____ DATE _____
 CHIEF INSPECTOR _____

SIGNING AND MARKING PLAN

MARYLAND AVENUE SIGNING & MARKING MODIFICATIONS

NO.	REVISIONS	APP'D	DATE
	DATE AUG 2021		
	JOB NO.		
	SCALE 1"=30'	DRAWING NO. <u>2</u>	FILE SN-02
		OF <u>4</u>	

SURVEY BOOK NO.

8/31/2021 \$FILE\$

INDEXED

DRILL HOLES


DRILL HOLES

DRILL HOLES

MARYLAND AVENUE IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.

MATCH LINE - SEE DWG. 2 OF 4

MATCH LINE - SEE DWG. 4 OF 4

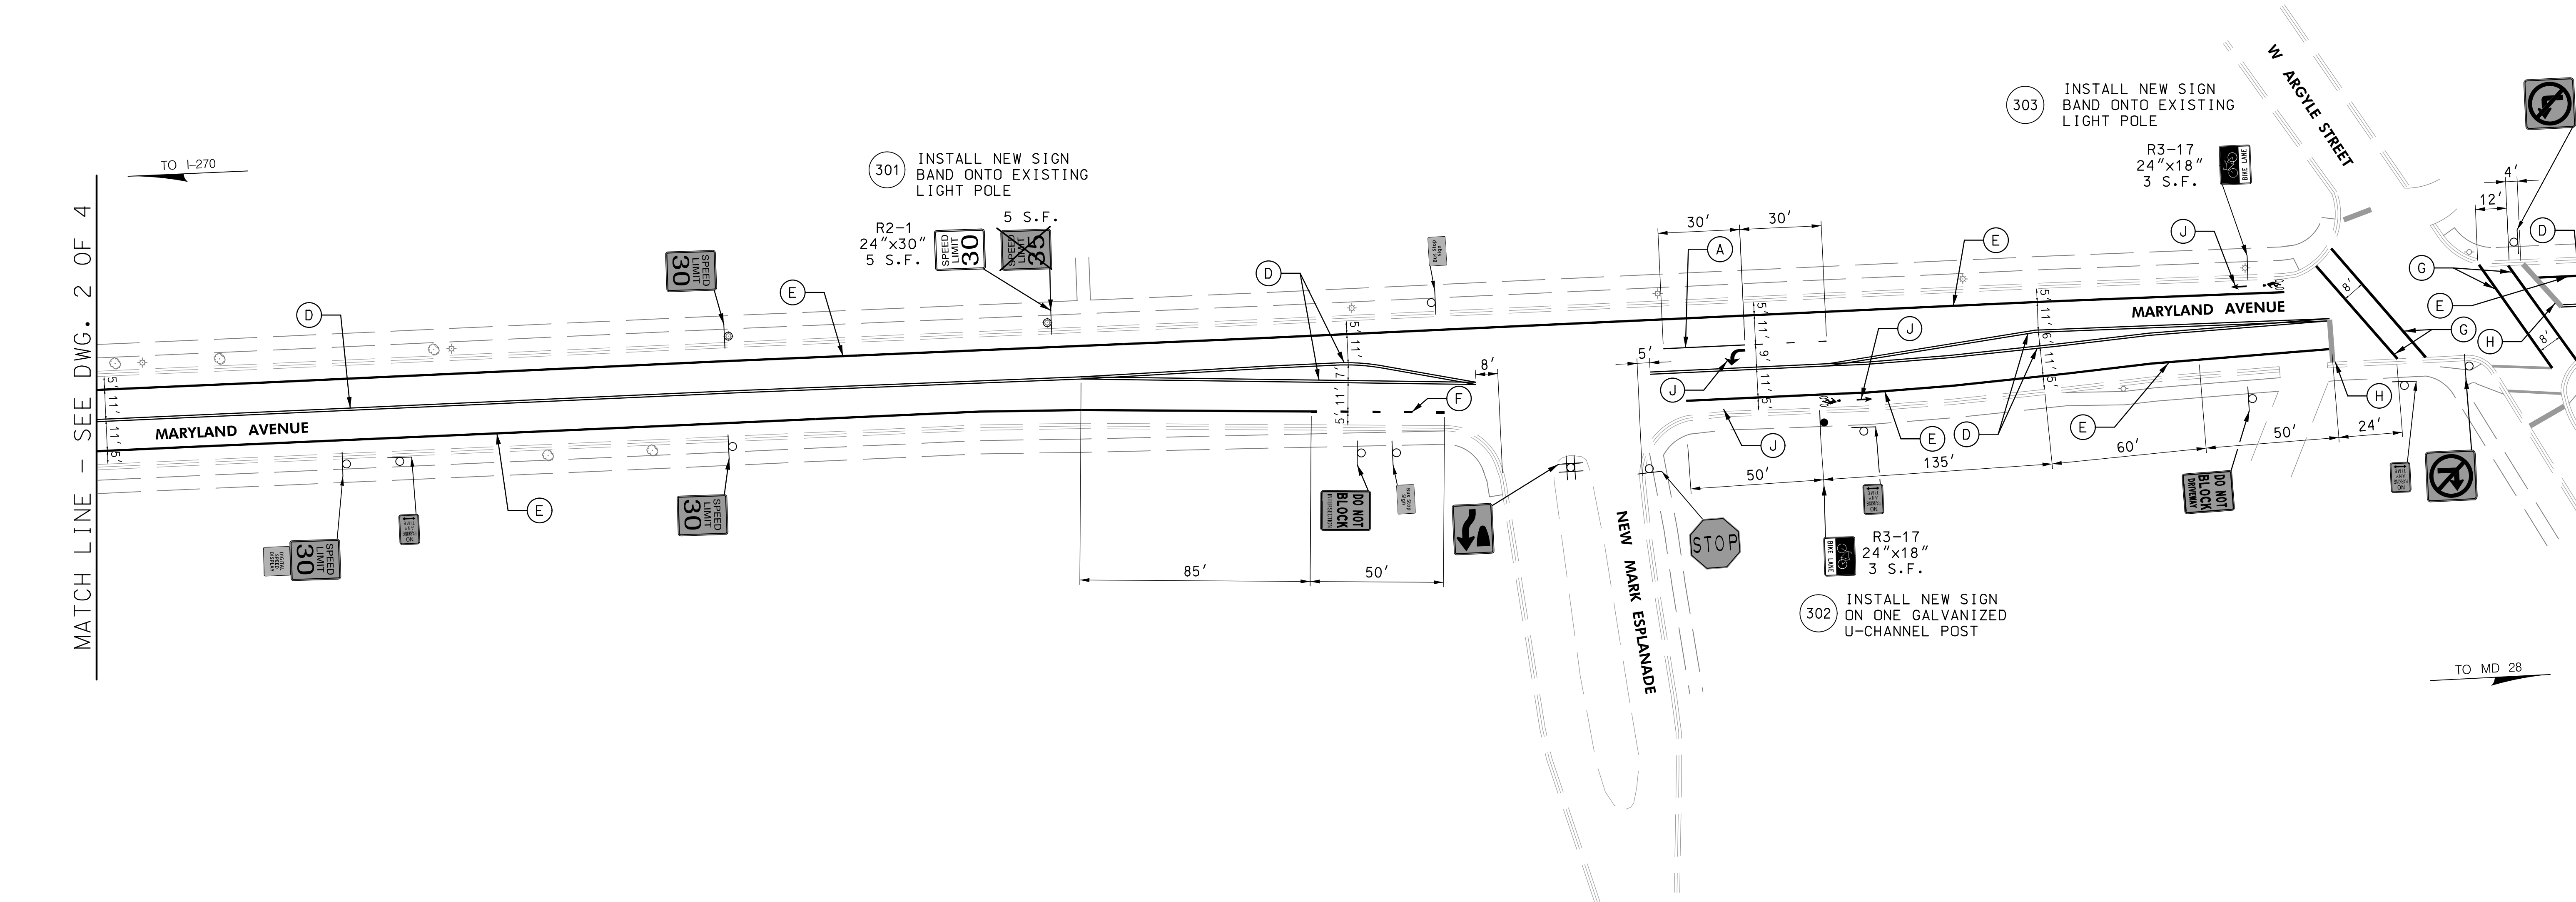

WALLACE MONTGOMERY
 ENGINEERS-PLANNERS-SURVEYORS-CONSTRUCTION MANAGERS
 10150 York Road, Suite 200
 Hunt Valley, Maryland 21030
 410.494.9093 Tel / 410.667.0925 Fax
 www.WallaceMontgomery.com A Limited Liability Partnership

LEGEND	
	PROPOSED SIGN & SUPPORT
	EXISTING SIGN & SUPPORT TO REMAIN
	EXISTING SIGN & SUPPORT TO BE REMOVED
A	5' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
B	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (10' LINE, 30' SPACE)
C	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
D	5' SOLID DOUBLE YELLOW LEAD FREE THERMOPLASTIC PAVEMENT MARKING
E	10' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
F	10' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
G	12" SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (CROSSWALK)
H	24" SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (STOP LINE)
J	WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS
K	REMOVE EXISTING PAVEMENT MARKING

BY: SXIONG

DESIGNED <u>R.W.E.</u>	APPROVED _____ DATE _____	GRAD. _____
DRAWN <u>D.M.J.</u>		PAV. _____
CHECKED <u>J.L.R.</u>	DIRECTOR OF PUBLIC WORKS	SD _____
		W&S _____
		SWM _____
		OTHER _____

DEPARTMENT OF PUBLIC WORKS
 CITY OF
ROCKVILLE
 MARYLAND AT VINSON ROCKVILLE, MARYLAND

DATE PROJECT STARTED _____	AS BUILT COMPLETED _____ DATE _____
DATE PROJECT COMPLETED _____	DATE ACCEPTED BY CITY _____
DATE TRANS. TO FINANCE DEPT. W/R 9 FORM _____	CHIEF INSPECTOR _____

SIGNING AND MARKING PLAN


MARYLAND AVENUE
 SIGNING & MARKING
 MODIFICATIONS

NO.	REVISIONS	APP'D	DATE
	DATE AUG 2021		
	JOB NO.		

SCALE	DRAWING NO.	FILE
1"=30'	NO. 3 OF 4	SN-03

MARYLAND AVENUE IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.

MATCH LINE - SEE DWG. 3 OF 4

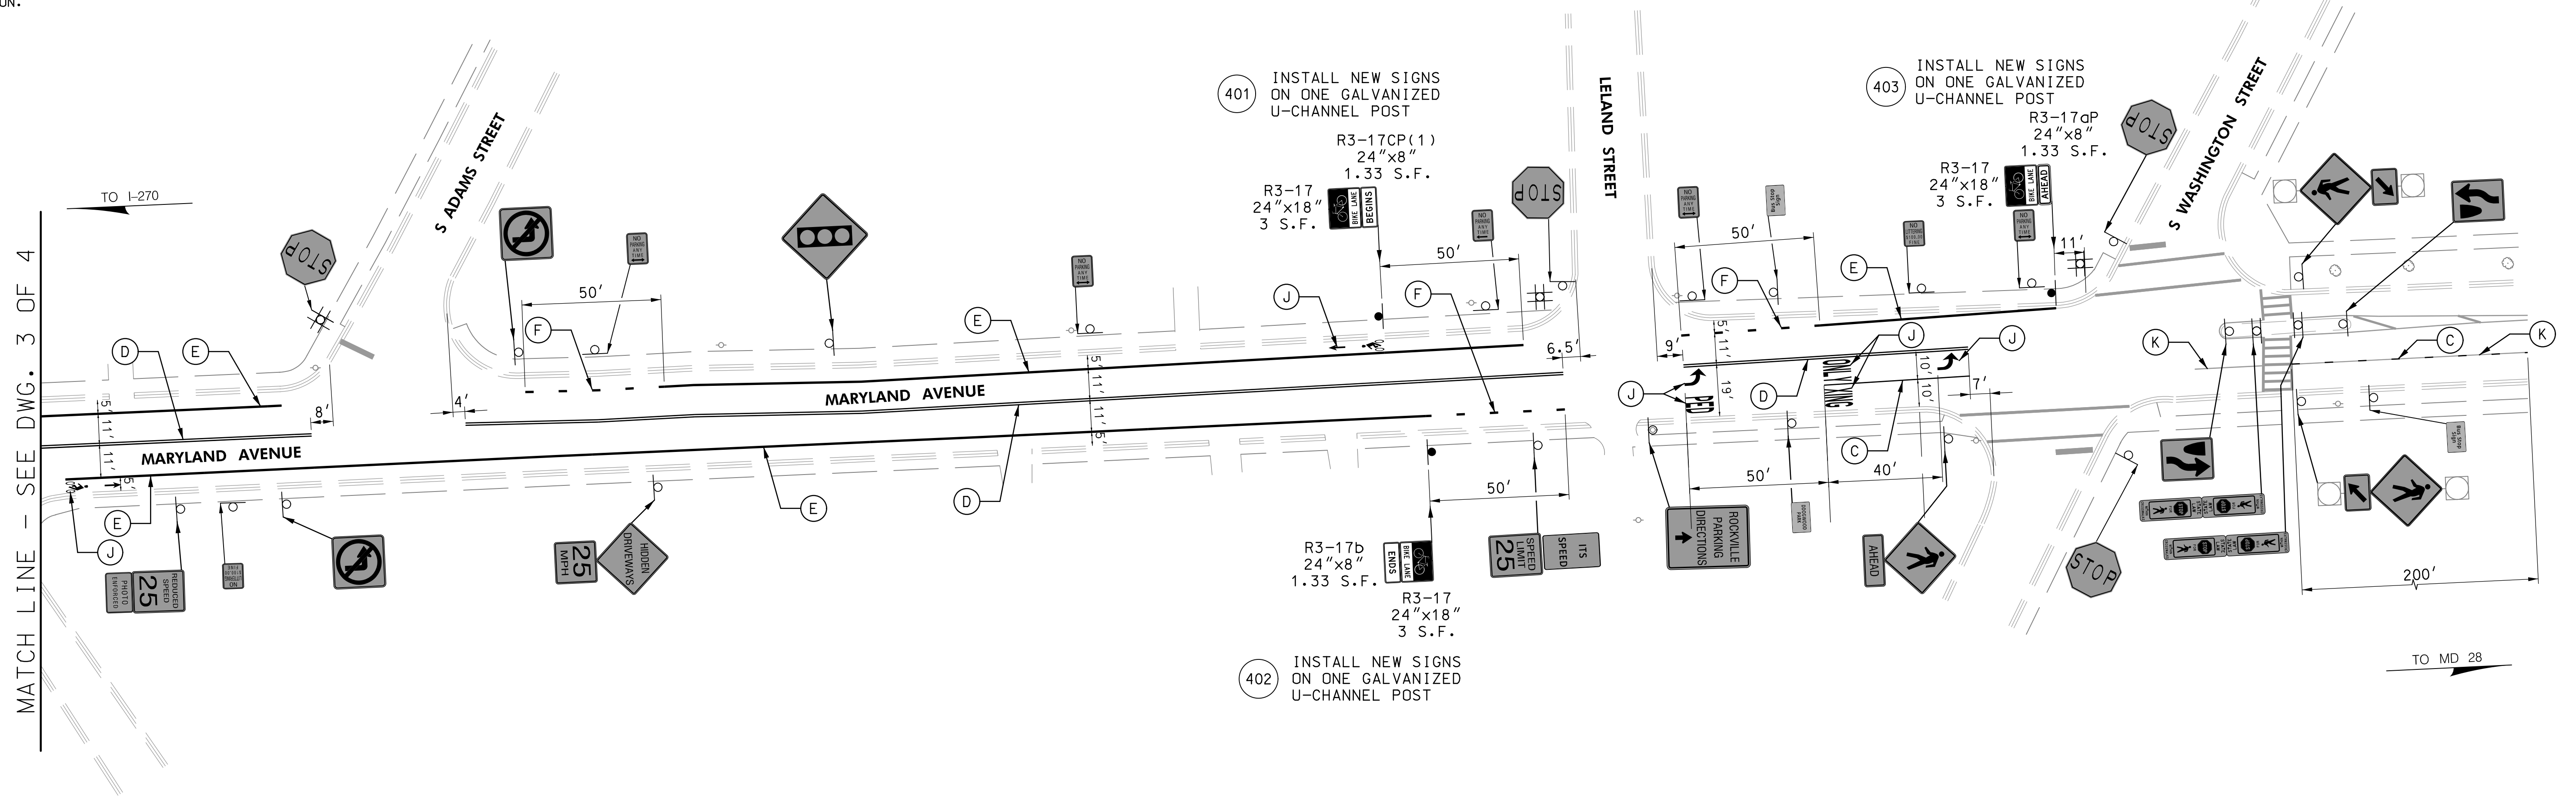

LEGEND	
	PROPOSED SIGN & SUPPORT
	EXISTING SIGN & SUPPORT TO REMAIN
	EXISTING SIGN & SUPPORT TO BE REMOVED
A	5' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
B	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (10' LINE, 30' SPACE)
C	5' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
D	5' SOLID DOUBLE YELLOW LEAD FREE THERMOPLASTIC PAVEMENT MARKING
E	10' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING
F	10' DASHED WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (3' LINE, 9' SPACE)
G	12' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (CROSSWALK)
H	24' SOLID WHITE LEAD FREE THERMOPLASTIC PAVEMENT MARKING (STOP LINE)
J	WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS
K	REMOVE EXISTING PAVEMENT MARKING

DESCRIPTION	UNIT	QUANTITY
5 INCH WHITE LEAD FREE REFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS	LF	650
5 INCH YELLOW LEAD FREE REFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS	LF	7280
10 INCH WHITE LEAD FREE REFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS	LF	5200
12 INCH WHITE LEAD FREE REFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS	LF	430
24 INCH WHITE LEAD FREE REFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS	LF	110
WHITE PREFORMAED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS	SF	170
REMOVAL OF EXISTING PAVEMENT MARKING	LF	250
GALVANIZED U-CHANNEL SIGN SUPPORT	EA	15
GALVANIZED U-CHANNEL SIGN BREAKAWAY BASE	EA	15
SHEET ALUMINUM SIGNS	SF	120
REMOVE EXISTING SIGNS	SF	11



WALLACE MONTGOMERY
 ENGINEERS-PLANNERS-SURVEYORS-CONSTRUCTION MANAGERS
 10150 York Road, Suite 200
 Hunt Valley, Maryland 21030
 410.494.9093 Tel / 410.667.0925 Fax
 www.WallaceMontgomery.com A Limited Liability Partnership

DESIGNED R.W.E.
 DRAWN D.M.J.
 CHECKED J.L.R.
 APPROVED _____ DATE _____
 DIRECTOR OF PUBLIC WORKS

GRAD. _____
 PAV. _____
 SD _____
 W&S _____
 SWM _____
 OTHER _____

DEPARTMENT OF PUBLIC WORKS
 CITY OF
ROCKVILLE
 MARYLAND AT VINSON ROCKVILLE, MARYLAND

DATE PROJECT STARTED _____
 DATE PROJECT COMPLETED _____
 DATE ACCEPTED BY CITY _____
 DATE TRANS. TO FINANCE DEPT. W/R 9 FORM _____

AS BUILT COMPLETED _____ DATE _____
 CHIEF INSPECTOR _____

SIGNING AND MARKING PLAN

MARYLAND AVENUE
 SIGNING & MARKING
 MODIFICATIONS

NO.	REVISIONS	APP'D	DATE
	DATE AUG 2021		
	JOB NO.		
	SCALE 1"=30'	DRAWING NO. 4	FILE SN-04
		OF 4	

SURVEY BOOK NO.

8/31/2021
 \$FILEL\$

INDEXED

DRILL HOLES

DRILL HOLES

DRILL HOLES

BY: SXJONG